Awning Windows

Hurd Windows and Doors

H3 REMARKABLY ADVANCED WINDOWS BY HURD

Our most popular H3 sizes & configurations.

All windows viewed from the exterior. Shown with standard rectangle grille pattern.

Sizing.
The H3's callout is the same as its rough opening dimension. The basic unit size (BUS) is 1/2" subtracted from the rough opening height and width.

Custom sizing to 1/8" available within the standard min and max sizes.

Factory mulling notation.
H3 factory mulls are constructed of a watertight continuous head and sill frame. This efficient system creates a variation in rough opening dimensions for field versus factory mulling. 2- and 3-wide fixed combinations are not available factory mulled.

***Please note** that field mull unit dimensions will be 1/2" larger in width per mull in comparison to factory mulls.*

***Check with your local building inspector** to confirm window complies with your local, state, regional and national interpretation of the building codes.*

H3 Operating Awnings

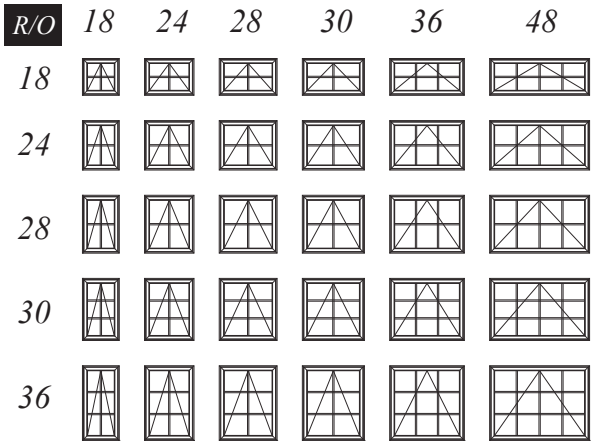

H3 Twin Operating Awnings

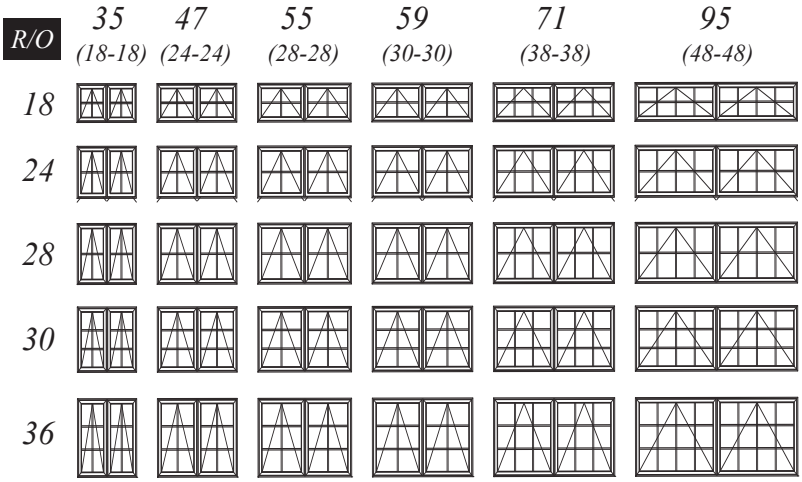

H3 Fixed Awnings

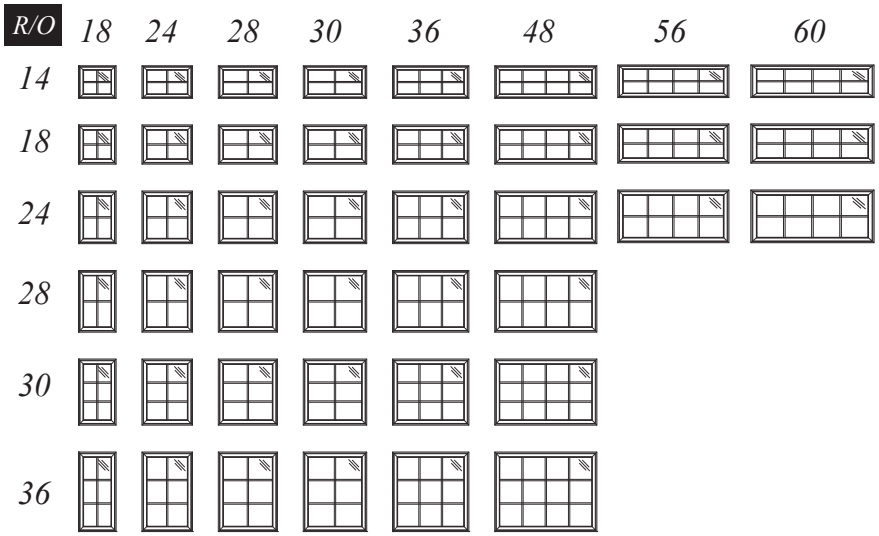

Operation is operating/operating. Fixed/fixed available for 18" and 24" widths.

H3 Fixed Over Operating Awnings

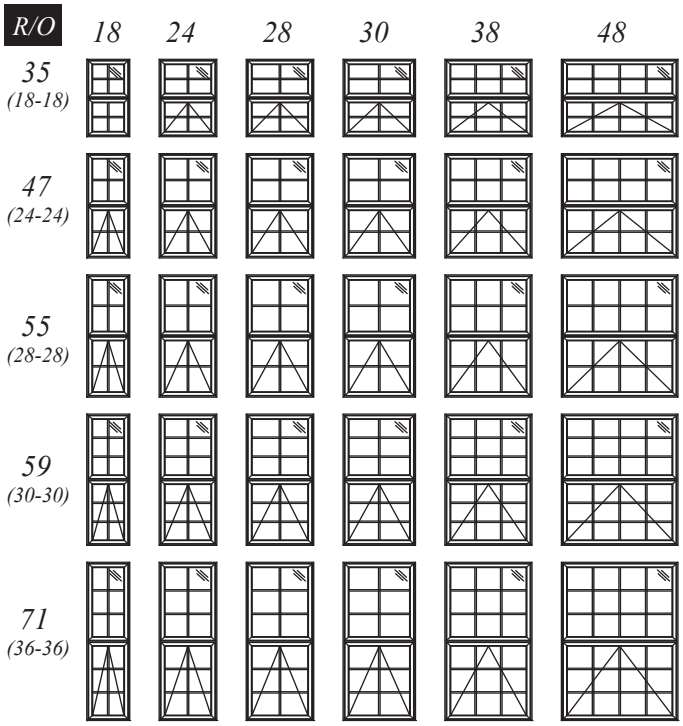

Available operating or fixed. Factory stacking available as fixed over operating only.

Half Rounds for Singles

C24-1X12 *C28-1X14* *C30-1X15* *C36-1X18*

Half Rounds for Twin

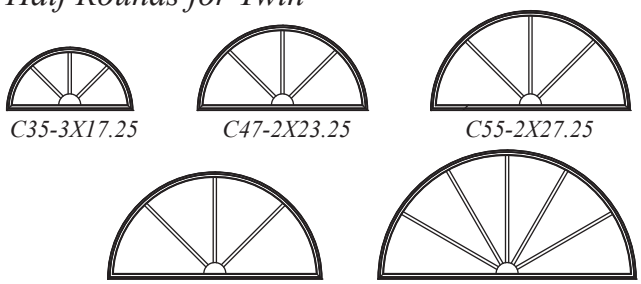

C35-3X17.25 *C47-2X23.25* *C55-2X27.25*

C59-2X29.25 *C71-2X35.25*